


			Ą			Ð	80			<u>T</u> Q	<u>f</u>								
OR-	J-3 O	R-J-DBL	OR-	24-2	OR-30-2	OR-36	6-2 OI	R-46-2	OR-45-	CV-3	OR-90	-CV-2	OR	PO2	OR-PC	02-P	OR-TC01		TC01-P
36			22			32		26	8			2		PODIU				NTER KIT	
30			~~~			32		20	•			~		TOP C	ONLY		тс	PONLY	
								B) A	aa	667			0				
OR-I	B90 C	R-B90A	OR-	B45 O	R-TOOL-B	OR-QL	-T2J OR-	QL-T2T	OR-UN	C-QL	OR-S	STG	OR	-PO3	OR-PC	D3-P	OR-TC02		TC02-P
					3	111		35	8			4		PODIU				NTER KIT	
					3	•••		55	•			-		TOP C	ONLY		ТС	PONLY	
						Í.		\sim	\leq	\supset	3	\supset							
OR-LC	D1-B OF	R-LCD2-B	OR-LO	CD3-B ST	EP STOOL-BLU	SPOTLI	GHT O	R-TBL	OR-TB	L2-L	OR-TE	BL2-R	OR	-PO4	OR-PC	D4-P	OR-TC03		TC03-P
		4			2	28		2						PODIU				NTER KIT	
						20								TOP C	ONLY		тс	P ONLY	
	OR-IS-24		OR-CIS-90							>	0	8							
	OR-IS-36	\sim																	
	OR-IS-46	\sum		OR-SE	-IS-90	OR-CIS	5-45 OR-A	TL-CNTR	OR-F		OR-P	01-P				J2-P	OR-TC04	NTER KIT	TC04-P
	OR-IS-48	$\langle \rangle$								PODIU TOP C				PODIU TOP C				P ONLY	
		\sim		4						IUPC									

Note: Table top finishes may vary. *-S, *-B, *-WD, *-DW



+	47.75" [1213mm]	25.75" [654mm]	47.75"	25.75" [654mm]	73.75"
	DBL-BS-1	DBL-BS-2	FS-3	BS-4	BS-5
83.75" [2127mm]	Velcro applied to this side.	Velcro applied to this side.	Notched 7/8" @ all four corners.	Notched 7/8" @ right corners. Hinged forward 7/8" @ right edge.	Notched 7/8" @ all four corners. Hinged forward 7/8" @ left and right edges.

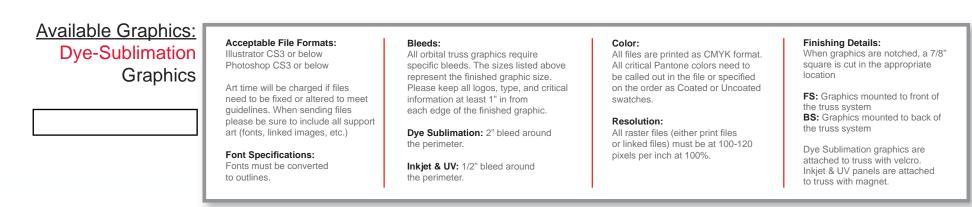

IMPORTANT INFORMATION REGARDING GRAPHIC FILES: Each graphic has a specific code or number located on the graphic.

The electronic print ready files provided must be named accordingly. Using this coding system will allow us to preflight and prepare your files for print more efficiently.



25.75"	47.75"	25.75"	47.75"		
[654mm]	[1213mm]	[654mm]	[1213mm]		
BS-6	FS-7	DBL-BS-8	DBL-BS-9		
Notched 7/8" @ left corners. Hinged forward 7/8" @ left edge.	Notched 7/8" @ all four corners.	Velcro applied to this side.	Velcro applied to this side.		

Available Graphics: Dye-Sublimation Graphics

Bleeds:

All orbital truss graphics require specific bleeds. The sizes listed above represent the finished graphic size. Please keep all logos, type, and critical information at least 1" in from each edge of the finished graphic.

Dye Sublimation: 2" bleed around the perimeter.

Inkjet & UV: 1/2" bleed around the perimeter.

Color:

All files are printed as CMYK format. All critical Pantone colors need to be called out in the file or specified on the order as Coated or Uncoated swatches.

Resolution:

All raster files (either print files or linked files) must be at 100-120 pixels per inch at 100%.

Finishing Details:

When graphics are notched, a 7/8" square is cut in the appropriate location

FS: Graphics mounted to front of the truss system BS: Graphics mounted to back of the truss system

Dye Sublimation graphics are attached to truss with velcro. Inkjet & UV panels are attached to truss with magnet.

IMPORTANT INFORMATION REGARDING GRAPHIC FILES: Each graphic has a specific code or number located on the graphic.

The electronic print ready files provided must be named accordingly. Using this coding system will allow us to preflight and prepare your files for print more efficiently.

Acceptable File Formats:

Illustrator CS3 or below

Photoshop CS3 or below

Art time will be charged if files

guidelines. When sending files

art (fonts, linked images, etc.)

Font Specifications:


to outlines.


Fonts must be converted

need to be fixed or altered to meet

please be sure to include all support



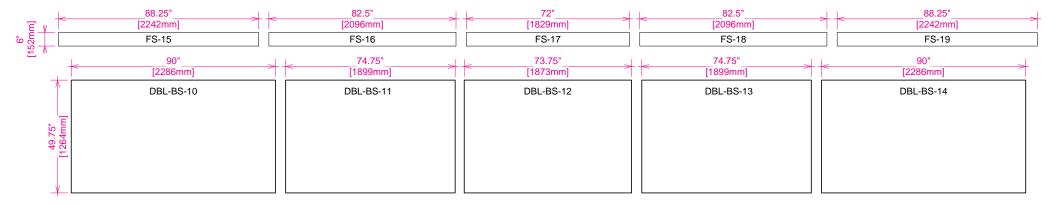


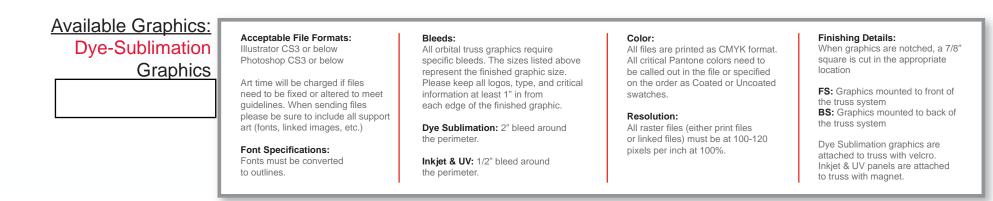

IMPORTANT INFORMATION REGARDING GRAPHIC FILES: Each graphic has a specific code or number located on the graphic.

The electronic print ready files provided must be named accordingly. Using this coding system will allow us to preflight and prepare your files for print more efficiently.



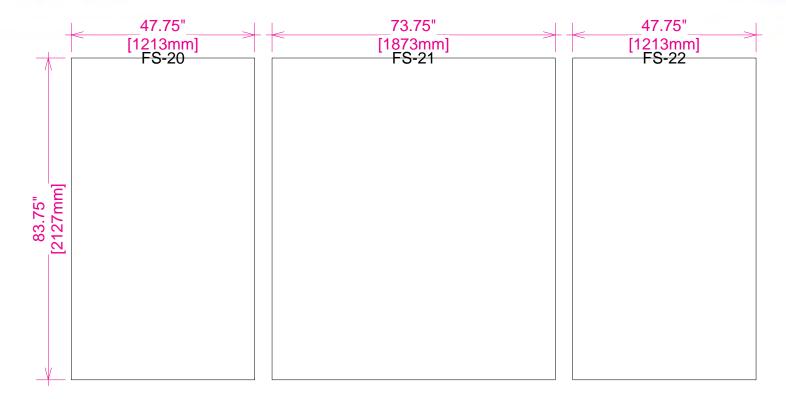

Available Graphics: Dye-Sublimation Graphics

Acceptable File Formats:

Illustrator CS3 or below Photoshop CS3 or below

Art time will be charged if files need to be fixed or altered to meet guidelines. When sending files please be sure to include all support art (fonts, linked images, etc.)

Font Specifications:

Fonts must be converted to outlines.

Bleeds:

All orbital truss graphics require specific bleeds. The sizes listed above represent the finished graphic size. Please keep all logos, type, and critical information at least 1" in from each edge of the finished graphic.

Dye Sublimation: 2" bleed around the perimeter.

Inkjet & UV: 1/2" bleed around the perimeter.

Color:

All files are printed as CMYK format. All critical Pantone colors need to be called out in the file or specified on the order as Coated or Uncoated swatches.

Resolution:

All raster files (either print files or linked files) must be at 100-120 pixels per inch at 100%.

Finishing Details:

When graphics are notched, a 7/8" square is cut in the appropriate location

FS: Graphics mounted to front of the truss system BS: Graphics mounted to back of the truss system

Dye Sublimation graphics are attached to truss with velcro. Inkjet & UV panels are attached to truss with magnet.


IMPORTANT INFORMATION REGARDING GRAPHIC FILES: Each graphic has a specific code or number located on the graphic.

The electronic print ready files provided must be named accordingly. Using this coding system will allow us to preflight and prepare your files for print more efficiently.

Graphic Specs:

07019-REV11, 16' x 18' Kit Size



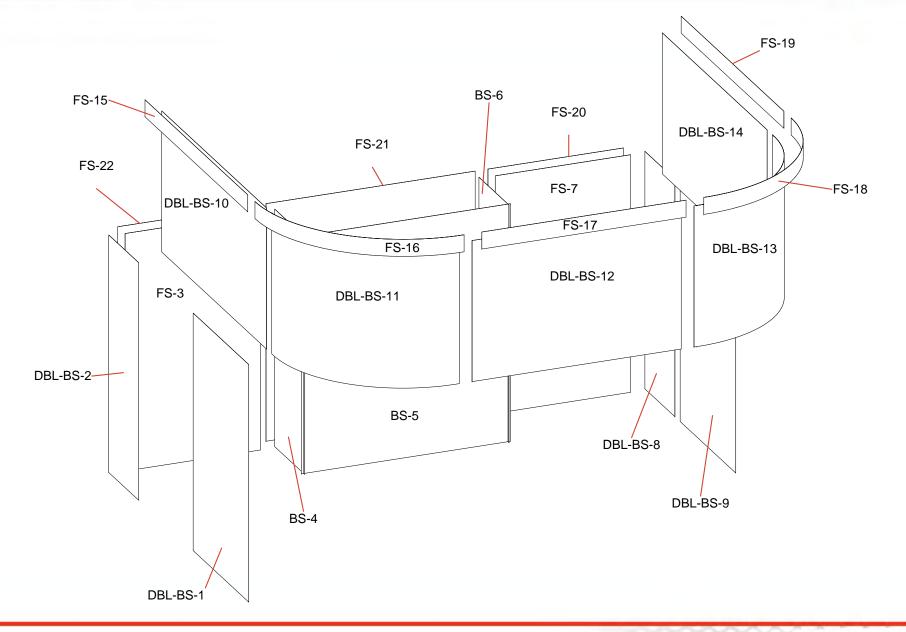


IMPORTANT INFORMATION REGARDING GRAPHIC FILES: Each graphic has a specific code or number located on the graphic. The electronic print ready files provided must be named accordingly. Using this coding system will allow us to preflight and prepare your files for print more efficiently.








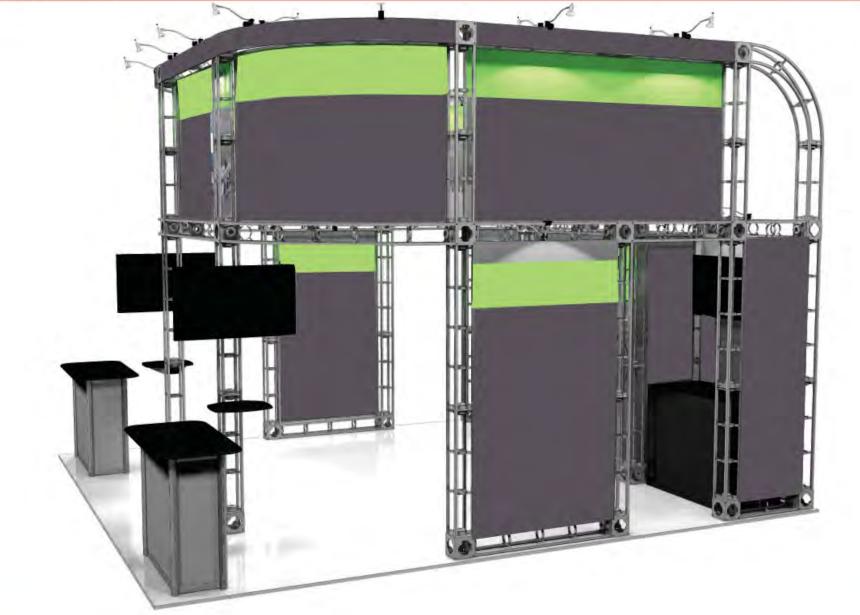




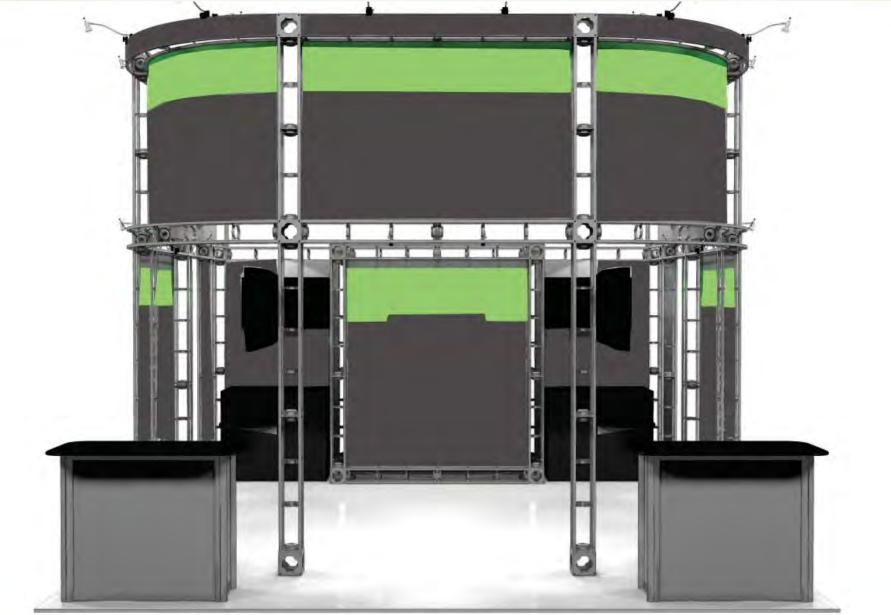









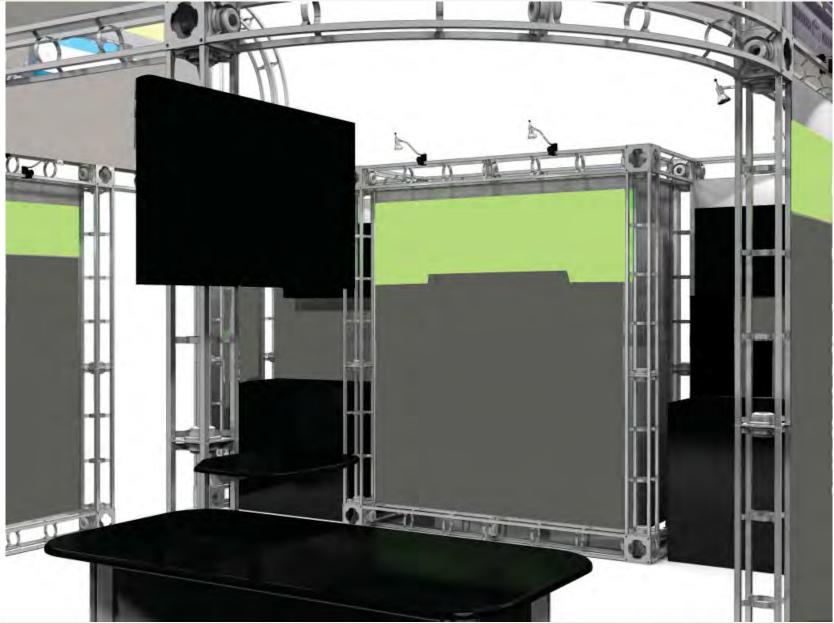



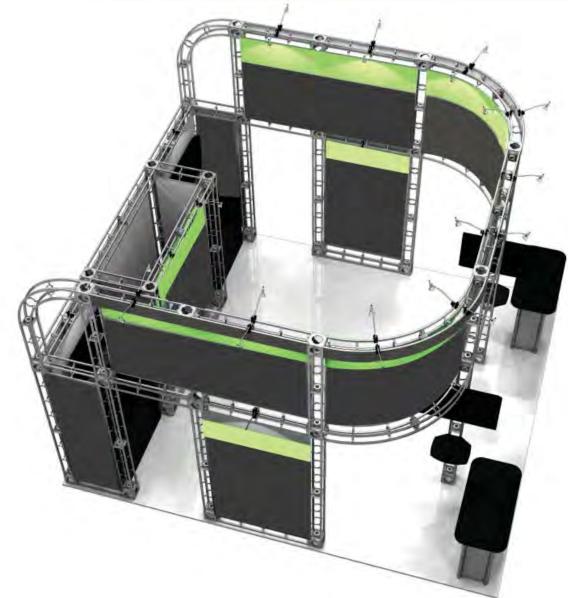



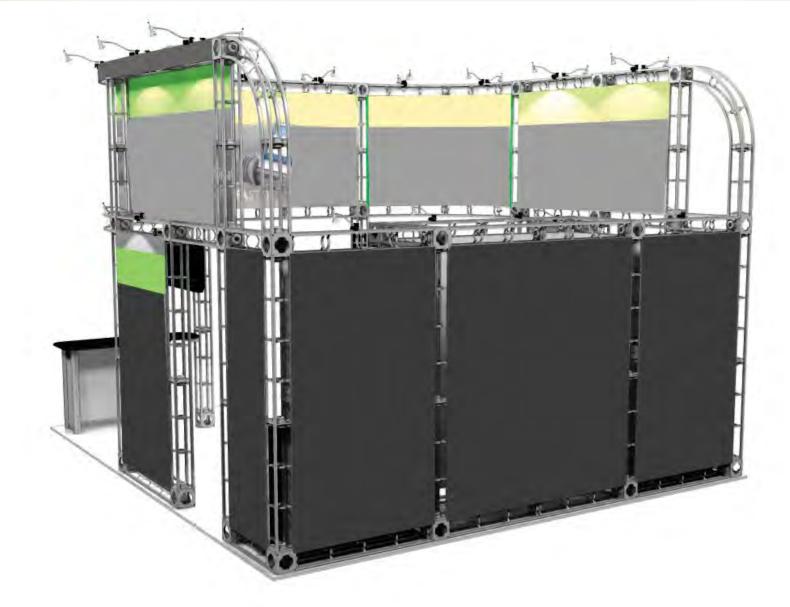


Floor Plan:


. 21

H. 15

11


07019-REV11, 16' x 18' Kit Size



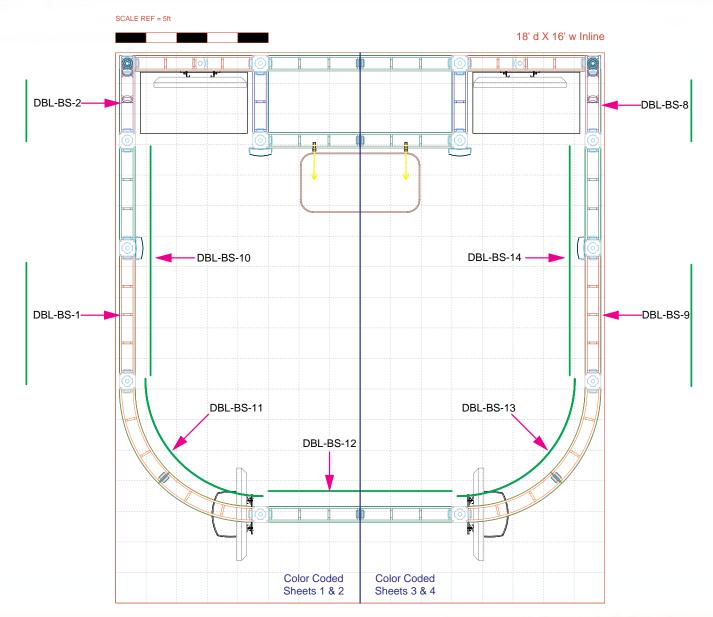


11 12




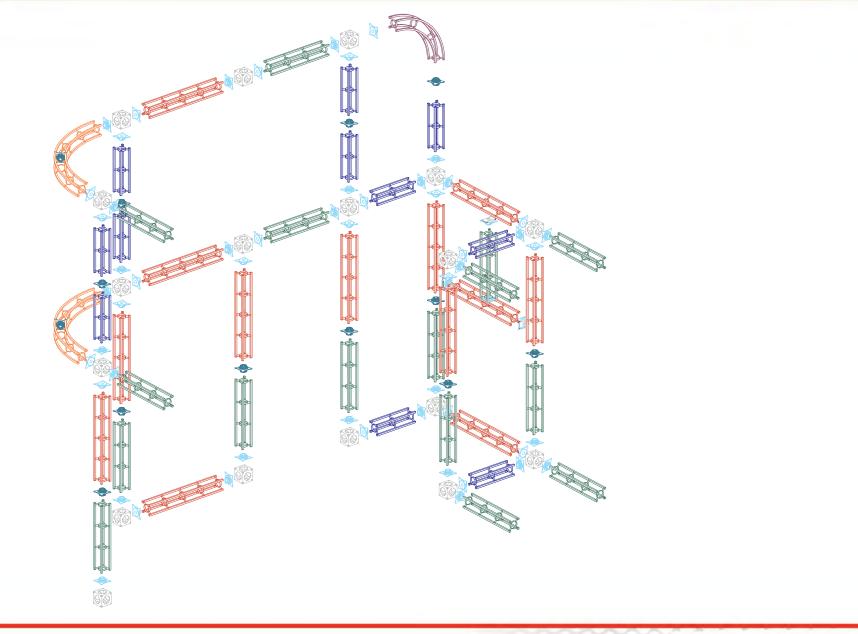




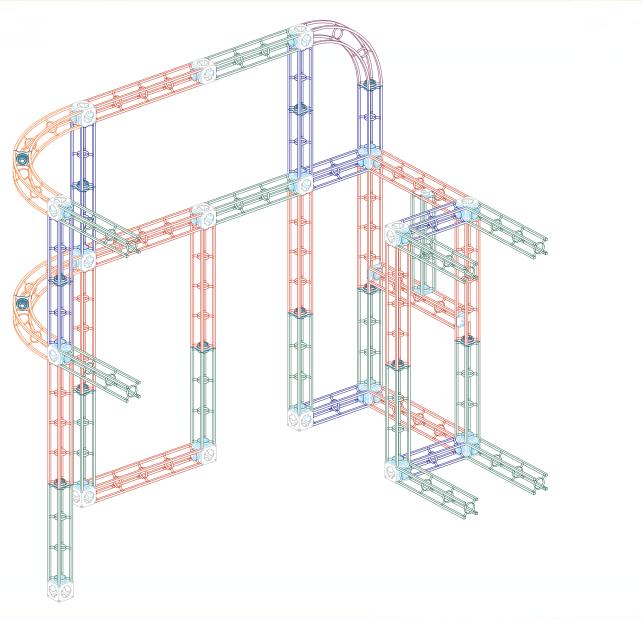




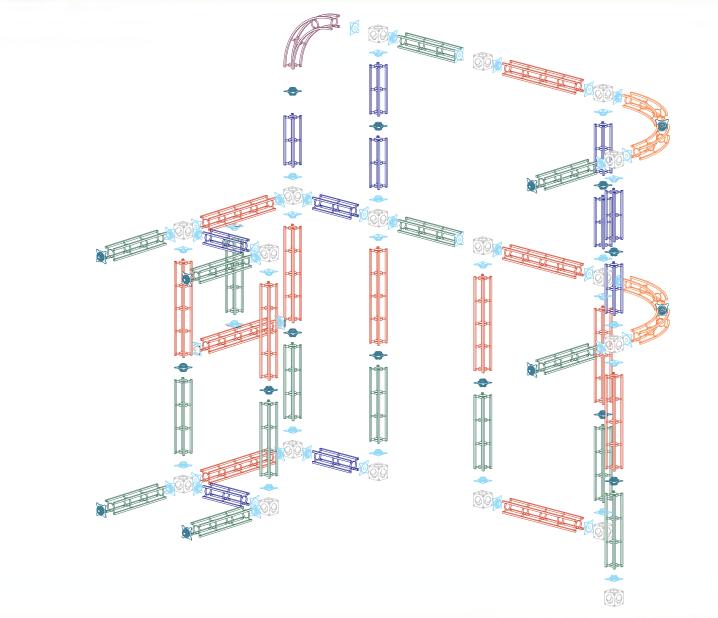




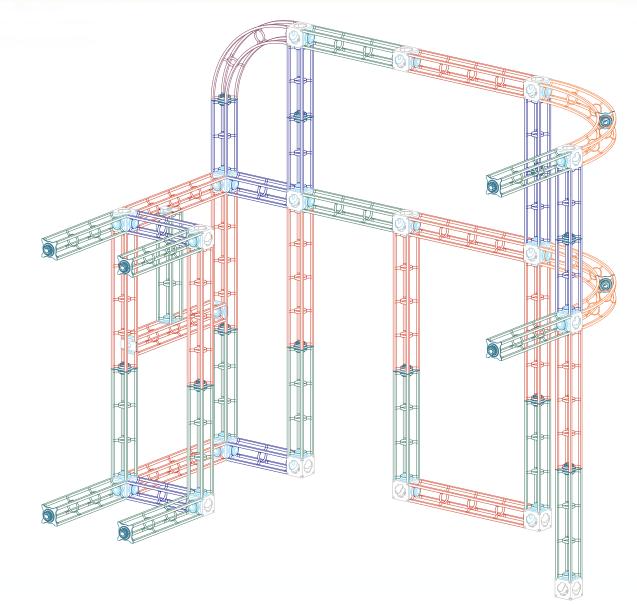



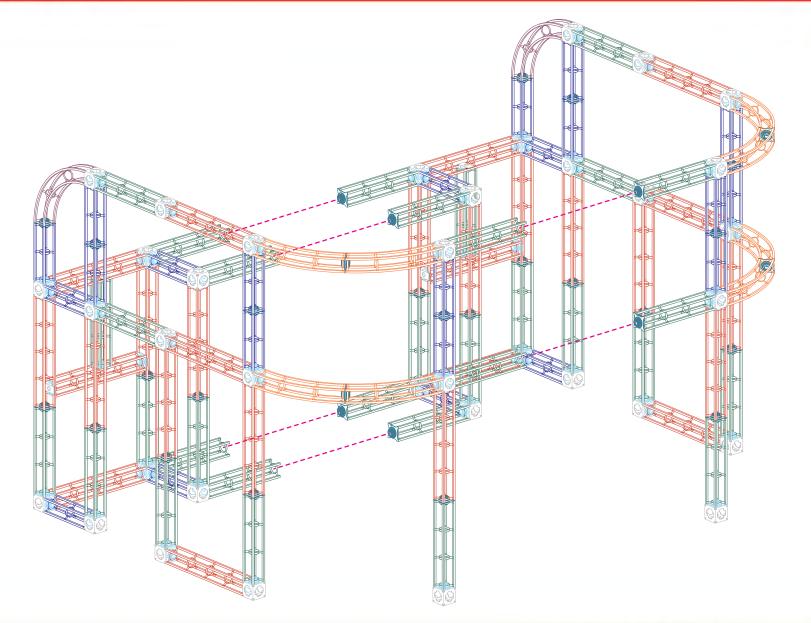




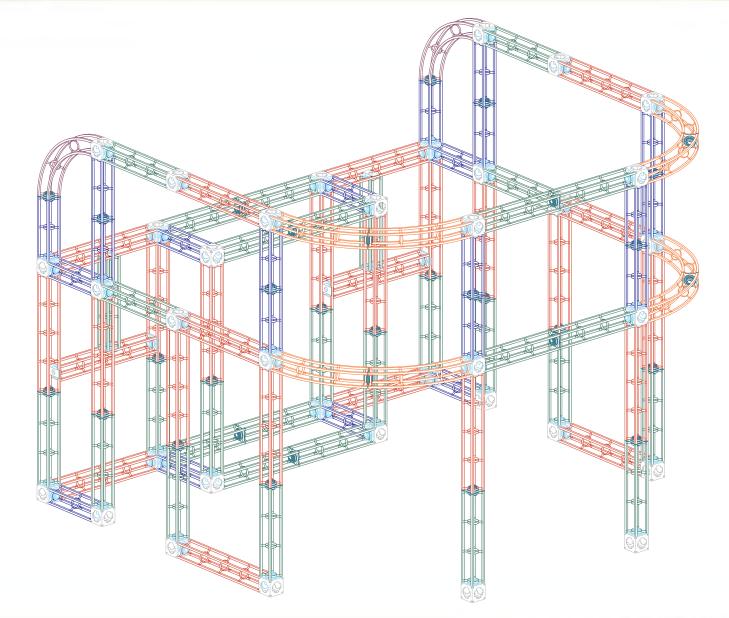

Case Count:

07019-REV11, 16' x 18' Kit Size



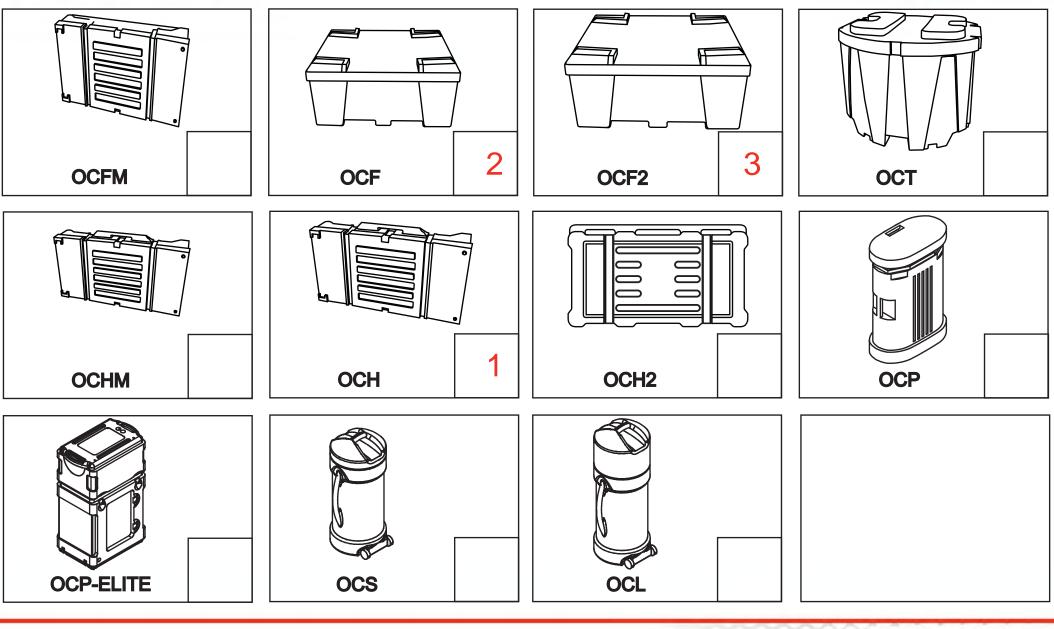

00000000000